


# WK 1510 Winch Kit Installation

## OPTION 1

This Option provides good holding power, especially when curtain machines are used. Using the holes on the corners of the plate, screw the Winch Kit on a post or flat surface as near the winch handle as possible. The hinge, when open, should point toward the winch handle. Remove the Handle Hook from the short loop by cutting or untying the cord. Cut a piece of plastic pipe nearly as long as the long string. Thread the looped end of the cord through the piece of pipe. Drape the looped end of the string over the hinge so that it rests at the knuckle of the hinge. Keeping the string as short as possible, tie the handle hook on the other end of the string and cradle the winch handle in the Handle Hook. Disengage the ratchet on the winch! Now the Winch Kit is carrying the weight of the winch handle.

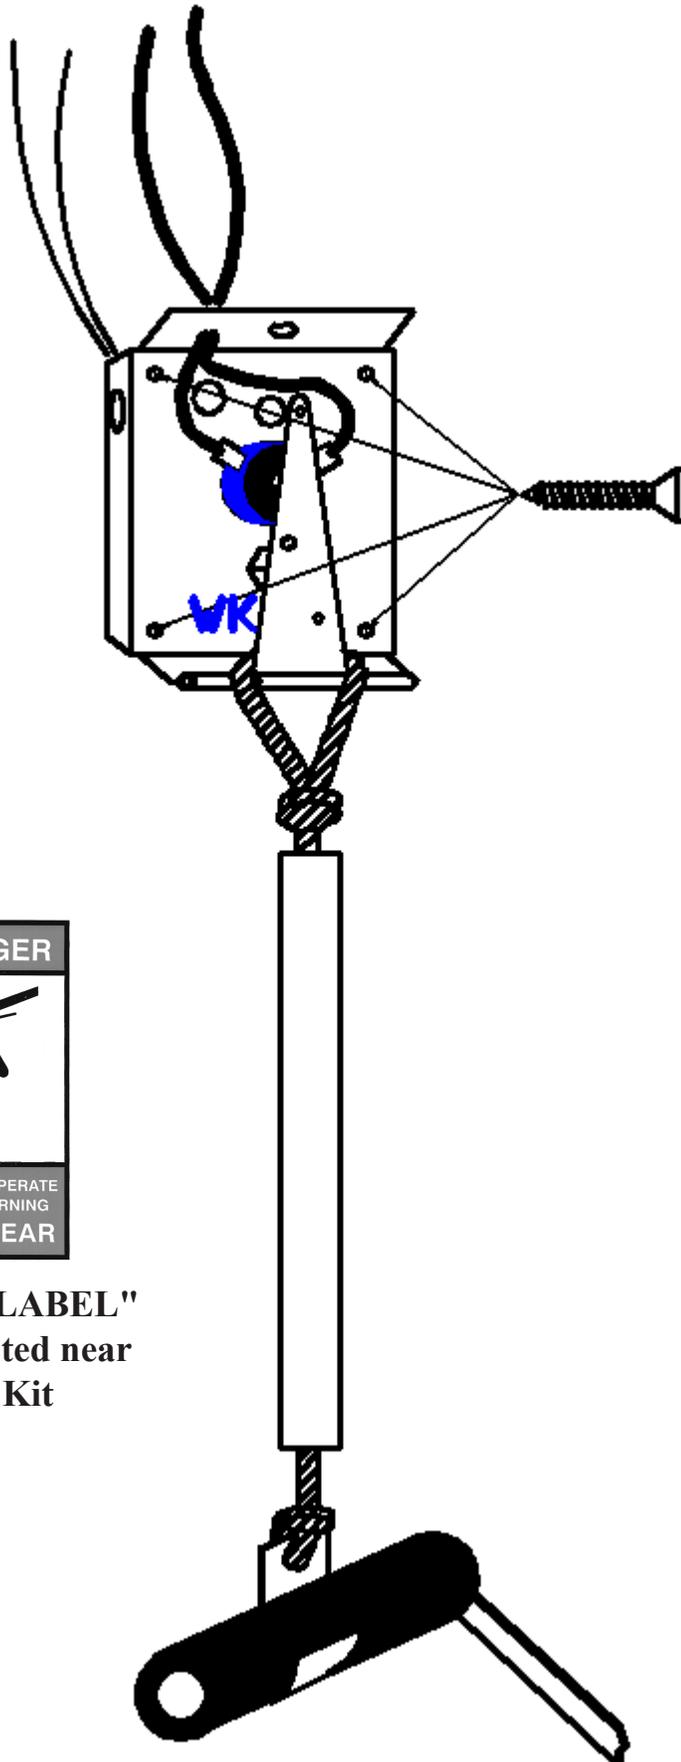


**"DANGER LABEL"**  
Must be posted near  
Winch Kit

# WK 1510 Winch Kit Installation

## OPTION 2



**"DANGER LABEL"  
Must be posted near  
Winch Kit**

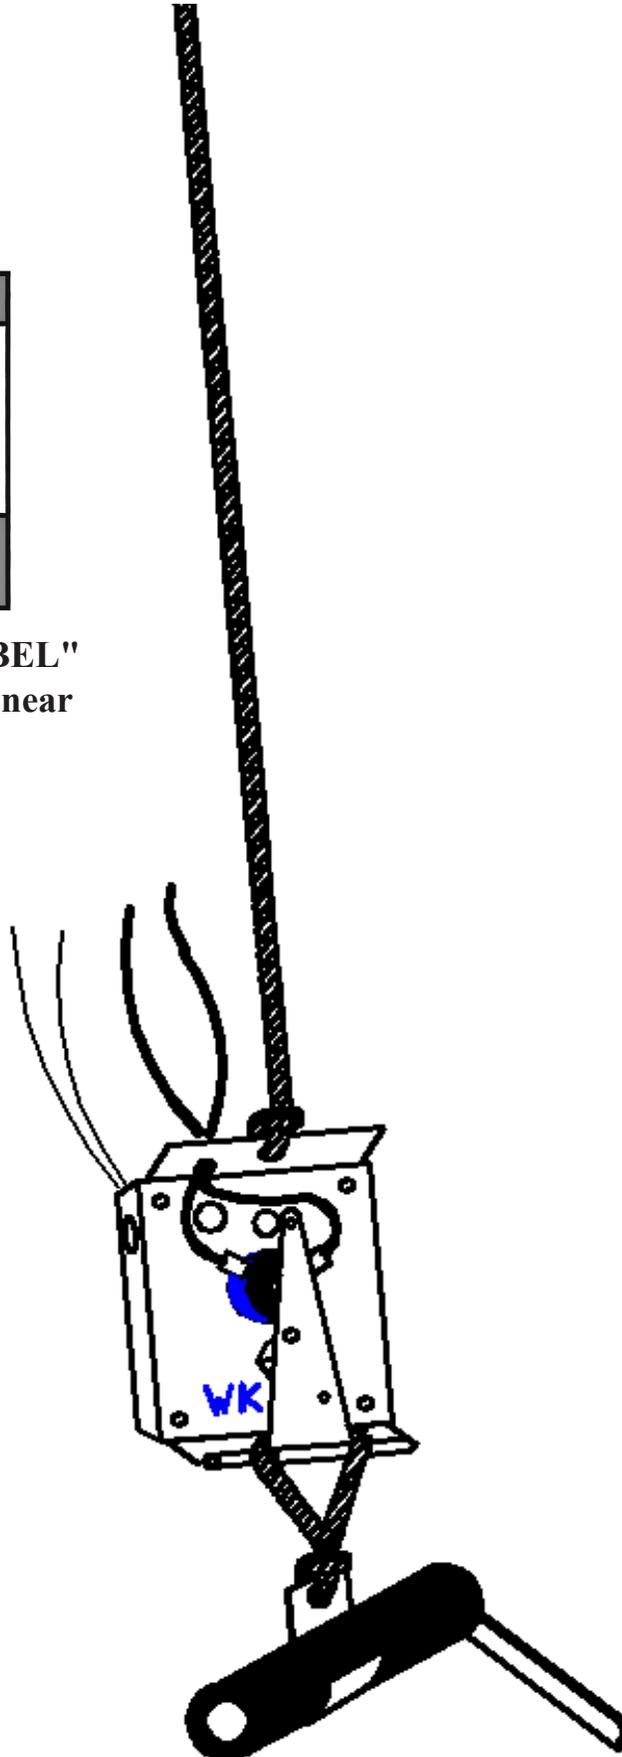

This Option eliminates the loss of the string with the Handle Hook. The string is tied above and to one side of the WK 1510 so the Winch Kit can swing out of the way of the winch handle. To operate, the Winch Kit is closed so the hinge meets the blue electro-magnet. Drape the string loop attached to the Handle Hook over the hinge. Make sure the loop drapes over the knuckle of the hinge and the winch handle cradles in the Handle Hook. You may prefer to crimp the Handle Hook to the winch handle to prevent it from getting lost.